




ITEM NO. KNEX8

Explosion Proof Telephone with Loudspeaker and Flash Light

DESCRIPTION

1. Robust aluminium alloy die-cast body, vandal & tamper-resistant hardware
2. Waterproof rating IP66 dust proof.
3. Full keypad with memory, 3 button programmable telephone.
4. Magnetic reed hook-switch.
5. Heavy duty handset with hearing aid compatible receiver, Noise canceling microphone.
6. Handset with industrial strong curly cord .
7. Stainless Steel keypad keep waterproof and dusty proof.
8. The loudspeaker and flash light
9. Door cover: orient automatically and good self - closing, convenient for use.
10. Temperature range from -20 degree to +55 degree.
11. Support echo cancellation.
12. Powder coated in UV stabilized polyester finish.
13. Application: Hazardous dust and gas atmospheres, petrochemical industry, Tunnel, metro, railway, LRT, speedway, marine, ship, offshore, mine, power plant, bridge etc.

SPECIFICATION


Types of protection:  II 2G Ex db ib IIBT5 Gb -20°C to 55°C
VoIP SIP2.0 telephone DTMF dialing MTBF:100000hours
Call Control Signaling: VOIP SIP Info(DTMF), RFC 2833(DTMF)
With built-in amplifier and with external speaker 5-30W **for your option**
With flash light
Power supply: AC220V Or AC110V (option) Auxiliary
Contacts:1 Aux Output, dry contact Contact Ratings. Load:
Resistive load
Rated load:0.3 A at 125 VAC; 1 A at 30 VDC Rated carry
current:1A



Max.switching voltage:125 VAC,30VDC Max.switching current:1A
 Sound level of ringing:over 100dB(A).at 50cm distance.
 speed dialing keypad:Super strong function is available for dialing 3 groups of numbers stored in the memory
 Audio Codes:G.711, G.722, G.729
 Network:10/100 BaseTX Ethernet, RJ45 connectors, Cat5e or better IP Protocols:IPV4, UDP, DHCP, SIP
 LAN Protocols:Power over Ethernet(PoE,802.3af), WLAN(IEEE 802.3af), Network Access Control(IEEE 802.1x)HTTP,HTTPS,SIP2.0
 Programming:Non-volatile flash memory programming and configuration through Web GUI
 Management and Operation:DHCP and static IP, remote automatic software upgrade, centralized monitoring.
 Echo cancellation code:G.167/G.168
 Housing: construction robust aluminium alloy die-cast body Unit size: 278X349X161MM
 Weight: 10.65kg(not include speaker and light) Environment conditions:
 Ambient temperature: -20°C to 55°C.Relative humidity:10%~95%Atmospheric pressure: 86~106Kpa Circumstance noise:less than 60dB(A) Degree of protection: IP66

WIFI:


Ethernet port : 2 (one of which is used for an external network port transformer)
 Working frequency : 2.4G,
 Working frequency : 802.11b/g/n: 2.4GHz-2.483GHz (China)

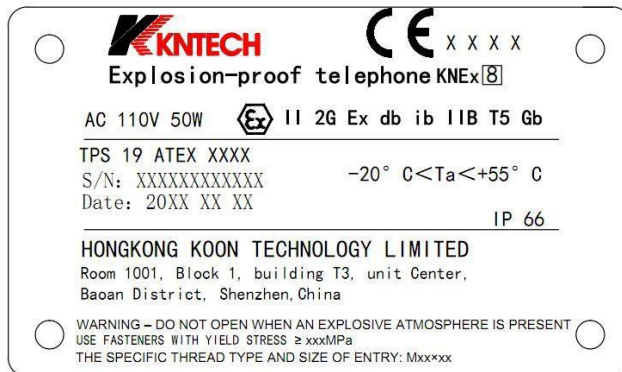

SUPPLIER OF BELOW LISTED COMPANY:




INTERFACE CONNECTION SCHEMATIC DIAGRAM

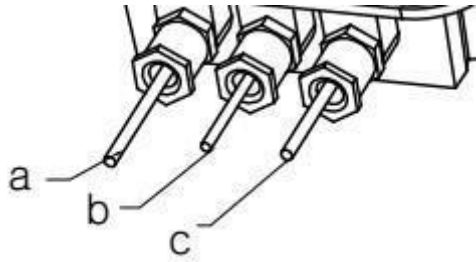

- a : AC power cord (option : 3-core wire)
- b : Network cable above cat 5
- c : Headset and D20 ringtone and LED DC5V/0.75W and explosion proof horn connection cable(option:8-core wire)


NETWORK CONNECTION

Connect the IP machine to the company's IP telephony network system. Before connecting to the network, check whether the network system is working properly. Direct network connection - In this way, you need at least one Ethernet port in your work place. Connect the LAN port to the Ethernet port of your workspace using the Ethernet cable on the back of the phone.

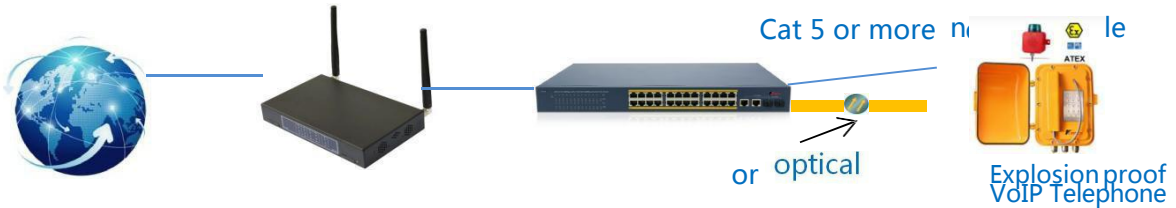

USER PROGRAMMING

pick up the Handset, press the keyboard storage key+address key(digital 0 --- 9)+phone number+storage key, and then hang up.

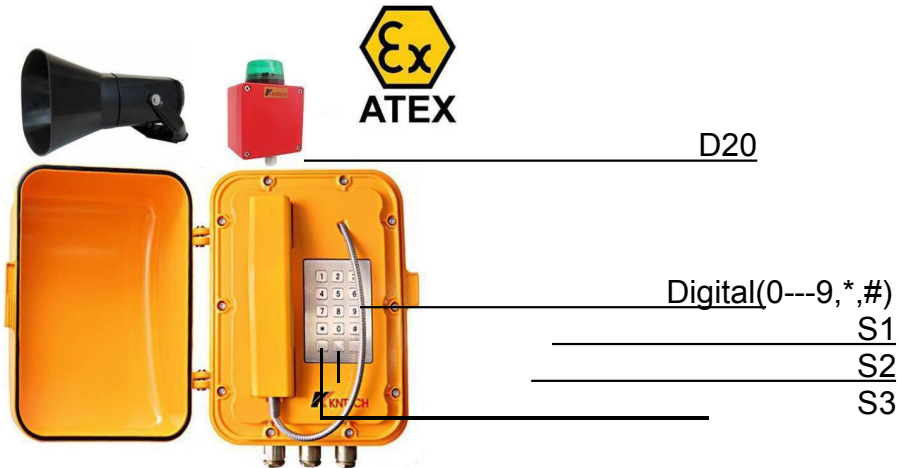

THE TELEPHONE LAYOUT

