




15W speaker Model: L-P-15W10W

Rated Input	15 W-10W
Rated Impedance	70 V line: 327 Ω (15 W), 1.67 k Ω (10 W), 100V line: 666 Ω (15 W) 100V line: 1000 Ω (10 W)
Sensitivity	95 dB (1 W, 1 m) (500 Hz - 5 kHz, pink noise)
Frequency Response	110 Hz - 13 kHz
Speaker Component	(6.5")
Applicable Cable	Solid copper wire: ϕ 0.8 - ϕ 2.0 mm (AWG 20 - 12) 2 Stranded copper wire: 0.5 - 2.0 mm (AWG 20 - 14)
Connection	Push-in connector (bridging terminal)
Operating Temperature	-10 $^{\circ}$ C to +50 $^{\circ}$ C (14 $^{\circ}$ F to 122 $^{\circ}$ F)
Finish	Cabinet: ABS (Acrylonitrile Butadiene Styrene) , white Grille: Surface-treated steel plate mesh, white
Dimensions	260 (W) \times 183 (H) \times 130 (D) mm
Weight	2.6 kg (5.73 lb)
Accessory	Rubber grommet ...2, Speaker mounting screw (4 \times 16) ...4,



Metal grille, reliable quality

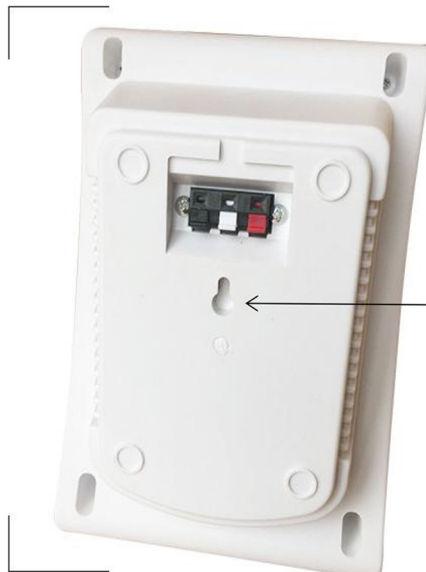

← WALL MOUNTING