

User's Guide for
HEAVY DUTY ANALOGUE PHONE
ETSP-11



1. Operations & Use

⇒ Receive a call:

Pick-up the handset when the phone rings. Put the handset back in the cradle when call is finished.

⇒ Dial:

Handset type: Pick-up the handset, you will hear a dialing tone - dial the number.

⇒ Program speed dial

Connect phone line, move jumper on the PCB from 1 to on, Pick-up the handset, input numbers, press any blank key at right keypad as address of your stored number. Put the handset back in the cradle, move jumper at the PCB from on to 1. close phone case


⇒ Speed dial

Pick up handset, Press any key of right side 3 blank keys. Dialed out.

2. TECHNICAL SPECIFICATION

1. Applicable for various types of SPC exchange and dispatching exchange system with feeding voltage of 45-60V.
2. Ambient temperature: $-30^{\circ}\text{C} \sim 75^{\circ}\text{C}$ Relative humidity: 10%~95%
Atmospheric pressure: 86~106Kpa Circumstance noise: $\leq 60\text{dB (A)}$
3. Sound level of ringing: $\geq 85\text{dB (A)}$.
4. The distance between telephone to PABX Maximum: 7KM
5. Telephone line powered

Installation:

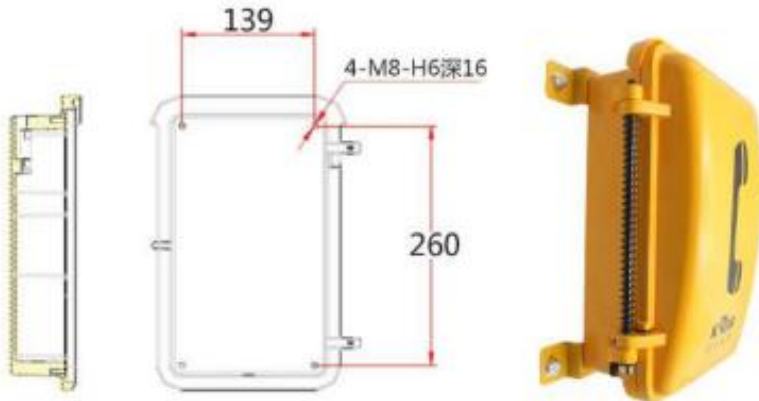

Unit size: 320x205x120 (mm)

Unit N.W.: 6.0KG